

KCS-TF3-230/3



| Hose Capacity (in) | | Motor Strength (HP) |
|--------------------|-----------|---------------------|
| 1 – 2 Wire | 3 | 7.5 |
| 4 SP / 6 SP | 2 1/2 / 2 | |
| Industrial | 2 1/2 | |
| Max opening (mm) | 100 | |

| Cutter Size | |
|---------------------|--------------------|
| L x W x H (in) | 39.4 x 28.0 x 45.3 |
| Weight (lbs) | 419 |
| Blade Diameter (mm) | 400 |

| Part Number | Motor Info |
|----------------------|---------------------|
| KCS-TF3-230/3 | 7.5 HP (230 V) 3 PH |


Description: A stand alone unit ideal for cutting 3" two wire hose and 2" six spiral hydraulic hose. The blade is recessed inside the base for additional safety.

Suggested for use with KC3-H135 series crimpers.


Included Accessories:



Enclosed Blade Chamber



Ventilation Port*




Serrated Blade†
BLADE-SER400


* Separate suction device required for fume extraction

† CAUTION: Not for use with hoses containing steel, helical reinforcement.

Optional Accessories:




Centering & Measuring Device
CENTER-KCS

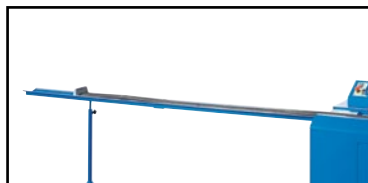

Measuring Hose Tray
TRAY-KCS



Stroke Counter
STROKE-KCS



Smooth Blade
BLADE-SMT400



Diamond Blade
BLADE-DIA400

Because we continually examine ways to improve our products, we reserve the right to alter specifications or discontinue products without prior notice.